



LED-VTUP

Date: _____
 Type: _____
 Project: _____

General Description:

The LED-VTUP is an Enclosed and Gasketed fixture designed for parking garage applications.

The inline thermal-formed lenses in crepe pattern acrylic is designed to enhance the “Bat Wing” distribution

Features and Benefits:


- The housing is a Compression molded self-extinguishing fiberglass reinforced polyester compound with UL 5VA flame rating (ASTM D635-74). F1 rating.
- LED boards are mounted on an internal angled gear tray and feature a specular, high reflectance center “V” reflector for broad lateral light distribution.
- A separate driver tray provides thermal isolation for long driver life.
- The VTUP housing is sealed against dust and moisture and available in a variety of latch, and wire-entry configurations.
- Standard with 7/8in KO’s on the ends.
- UL Wet Location listed
- IP65 (Standard 6-latch configuration)
- IP66 & IP67 (Optional 8-latch configuration)
- 40° C ambient temperature rating with the LG light engine.
- Standard stainless steel mounting brackets clip to housing for surface or all-thread pendant mounting.
- Molded latch pockets compatible with standard and tamper-proof latches in Celcon, stainless steel, and polycarbonate.
- LED light engine by LG Innotek.



SIDE VIEW



END VIEW



Applications:

Designed for use in Parking Garages.


Notice: Dimensions and specifications subject to change without notice.



LED-VTUP

Date: _____
 Type: _____
 Project: _____

LED VTUP		
LG Innotek driver and boards		
Specifications		4ft
Input Wattage		51.7
Deliverd Lumens (lms)		5602
Efficacy (LpW)		108.35
Color Rendering Index (CRI)		83.5
Color Temperature (CCT)°K		4233
Minimum Ambient Temperature (°F)		-4
Maximum Ambient Temperature (°F)		104
Dimming		0-10v
Rated Life (L70)		50,000
Warranty		5 years
Voltage (V)		120-277V
Operating Frequency (Hz)		50/60
UL		Yes
FCC		Compliant

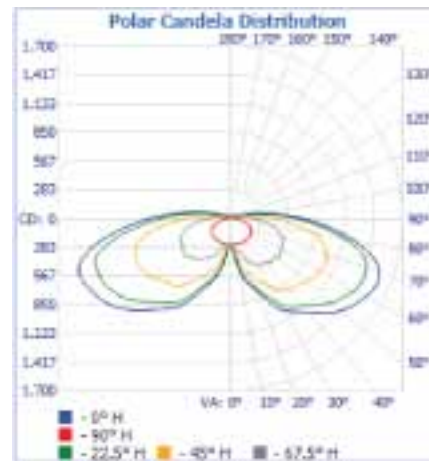

IES photometric files available upon request.

Values taken from LM-79 reports

Housing	Length	# of Latches	Color Temp	Driver/Board	Voltage	Options
LED-VTUP	4ft	6 (IP65) 8 (IP66 & 67)	30 3000	LG LG Innotek	EBUNI (Multi Volt 120/277)	CPA Crepe Pattern Acrylic Lens (standard) WCL White Celcon Latch (standard) WCLTP White Celcon Latch Tamper Proof WPL White Polycarbonate Latch WPLTP White Polycarbonate Latch Tamper Proof SSL Stainless Steel Latch SSLTP Stainless Steel Latch Tamper proof DM Dimming Ballast EMB Emergency Ballast
			35 3500			
			40 4000			
			50 5000			

Consult factory for additional options and accessories.

Notice: Dimensions and specifications subject to change without notice.